




PipeSak® Pipeline Protection

Technical Notes

PipePillo® Support Drawing

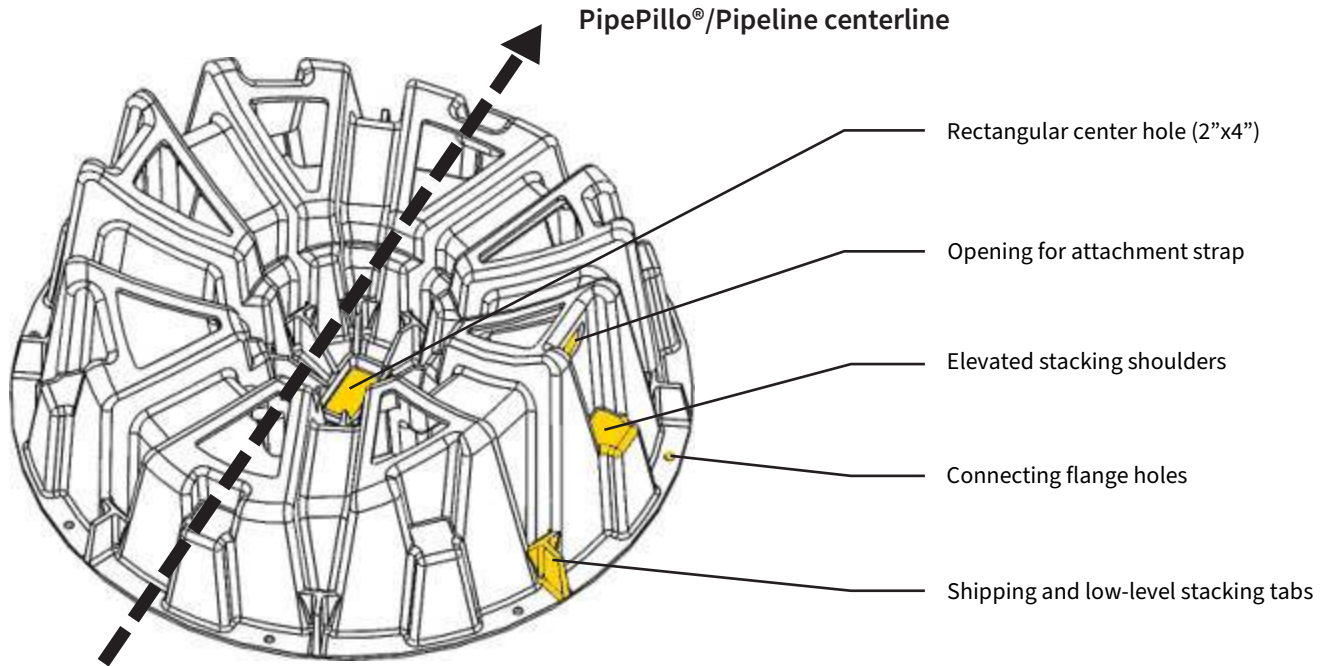

PipePillo® Pipeline Supports

Pipe OD		Weight		Load Capacity ¹	
Inches	(mm)	lbs	(kg)	lbs	(kg)
4.5	(114.3)	0.8	(0.4)	3,500	(1,588)
6.625	(168.3)	0.8	(0.4)	6,800	(3,085)
8.625	(219.1)	0.8	(0.4)	8,500	(3,856)
10.75	(273.1)	5.1	(2.3)	16,000	(7,258)
12.75	(323.9)	5.1	(2.3)	16,000	(7,258)
16	(406.4)	5.1	(2.3)	20,000	(9,070)
20	(508)	9.2	(4.2)	26,500	(12,020)
24	(609.6)	9.2	(4.2)	33,000	(14,970)
30	(762)	26.7	(12.1)	52,000	(23,587)
36	(914.4)	26.7	(12.1)	65,000	(29,480)
42	(1066.8)	42.8	(19.4)	68,000	(30,845)
48	(1219.2)	42.8	(19.4)	85,000	(38,550)



Durable Polypropylene Composition



Engineered, load rated, permanent Pipeline Support



Stackable Configuration¹

¹When stacked, PipePillo® pipeline supports have reduced capacities. Please contact PipeSak® pipeline Protection for details, installation instructions, and proper spacing.